RAYSCAN α

Lower dose
- Quick scan times
- Pulsed X-ray technology
- Multiple scan modes

Intelligent operation
- Ingenious cooling by ATCT
- Auto alignment
- Minimized preparation time
- Remote update

Technology for Convenience

make it easy, with Ray

reddot design award
winner 2012

INTERNATIONAL DESIGN
EXCELLENCE AWARDS '12
BRONZE

Easy to Read LED - Color coded exposure status

Intuitive user interface

Convenient wireless remote control

Designed for Optimized Workflow

make it simple, with Ray

Lower dose

The RAYSCAN α is designed with cutting edge detectors and pulsed X-ray technology. Various 2D panoramic modes provide the relevant clinical data you need to make accurate diagnoses. Proprietary CBCT reconstruction, Adaptive Moving Focus, and noise reduction technologies provide high quality images at optimized radiation exposure.

Super-Fast Scan Times

4 second cephalometric scans reduce dose by over 80%*

**Cutting edge cephalometric imaging technology results in fast scan times for orthodontic procedures.
The high performance Cadmium Telluride (CdTe) detector allows for the capture of excellent cephalometric images at a reduced radiation dose. Short exposure times reduce the risk of retakes associated with patient movement.**

* Compared to former products

Pulsed X-ray

Radiation dose is reduced through cycling off the generator during data transfer from the sensor. Operation of pulsed X-ray needs high frequency of generator. RAYSCAN α is designed to implement over 100 kHz for the operation of pulsed X-ray.

Intuitive interface

Simplified user interface provides an intuitive imaging workflow.

- Various scan mode with a simple selection on the main display
: Standard, Tooth/Full mode Segmentation, Bitewing, Orthogonal, Sinus, TMJ
- Tooth mode has less dose compared to a full mode panoramic.
- Automatically selected dental arch and X-ray exposure condition according to patient's age

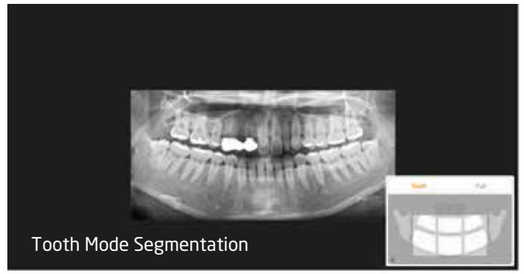

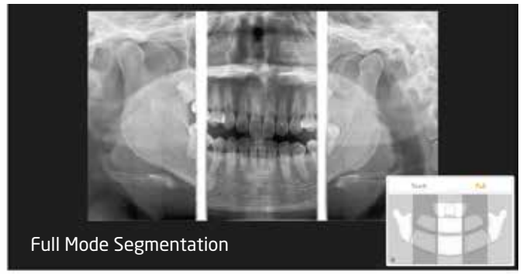

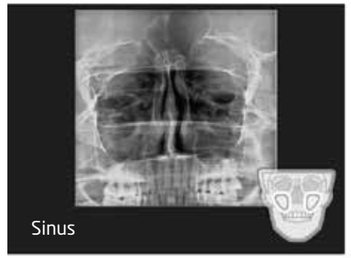

Excellent image quality through advanced technology

AMF (Adaptive Moving Focus)

RAYSCAN *α* utilizes Adaptive Moving Focus Technology to configure the panoramic image layer and optimize the signal to noise ratio(SNR) to produce high quality images.

[off]

[on]

Denoising

Proprietary noise reduction technology enhances image quality.



[off]

[on]

MAR (Metal Artifact Reduction)

Our own CBCT reconstruction technology significantly reduces metal artifacts such as stars and shadows caused by X-ray scatter with no additional procedure and time. With the same time, RAYSCAN *α* provides more information around metal for accurate diagnosis.

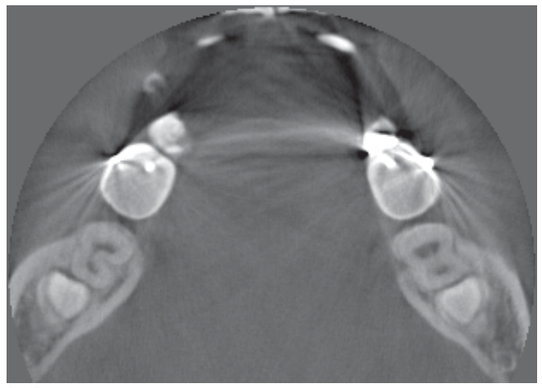

[off]

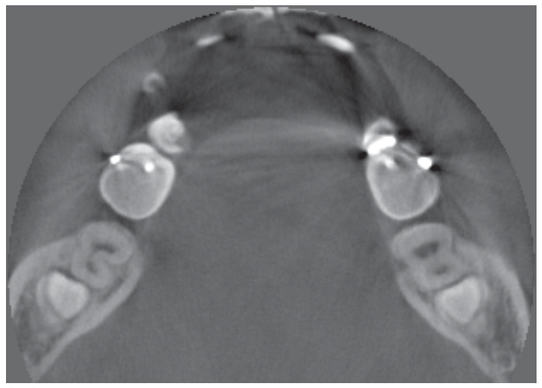

[on]

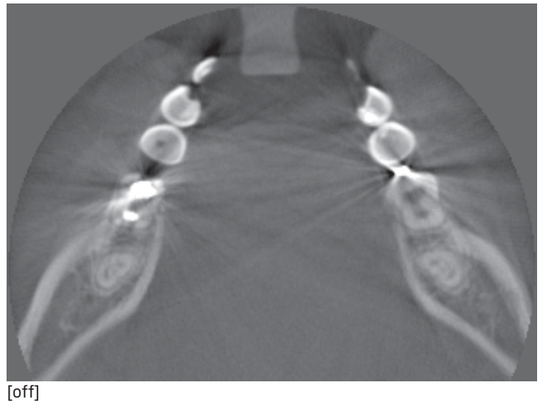

[off]

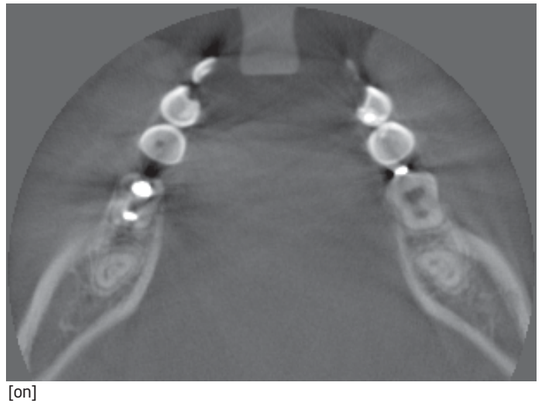

[on]

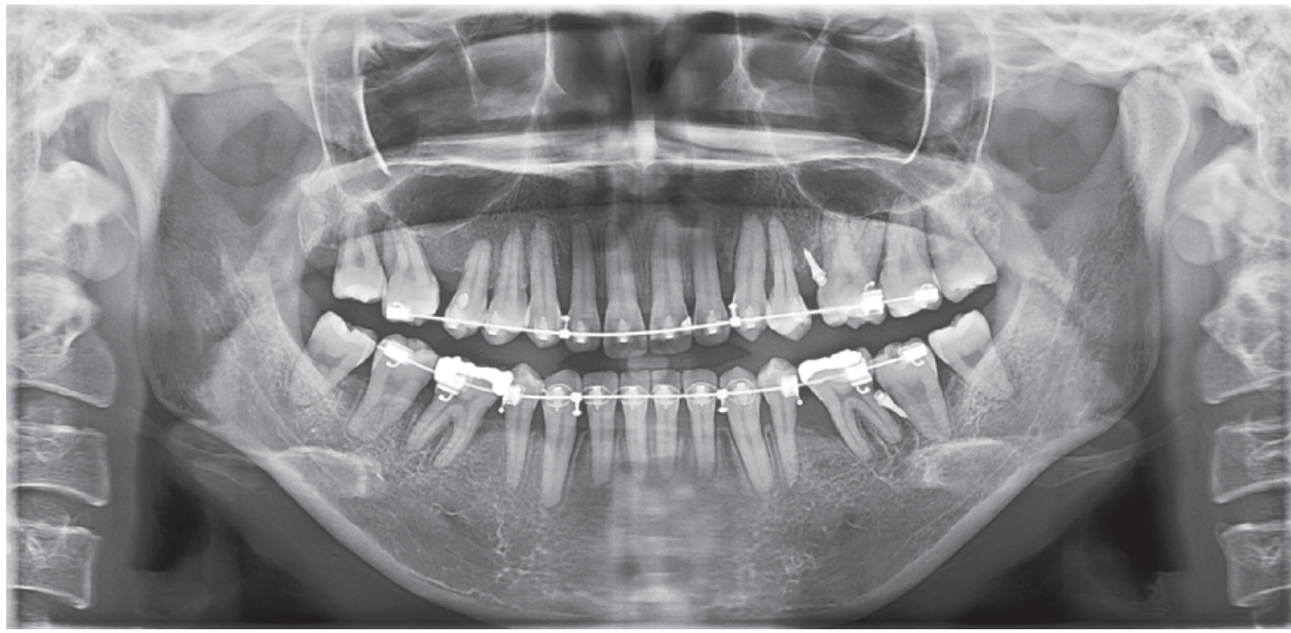

2D Imaging Software

Key Features

- Integrated dental image management
- Touch environment considered simple UI
- 16 bits full imaging system with DICOM 3.0
- Supports TWAIN-compliant input devices

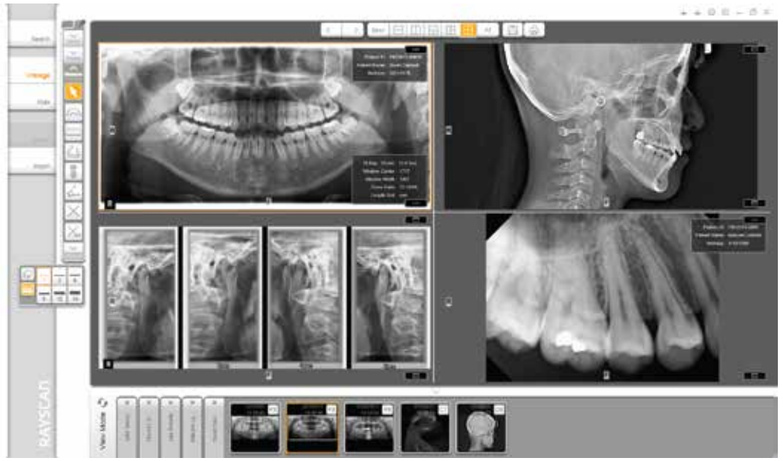

OnDemand 3D

Key Features

- Panoramic image & Cross-Sectional image
- Excellent 3D image with shading technology
- Nerve canal drawing & implant simulation
- DICOM print & CD/DVD burning

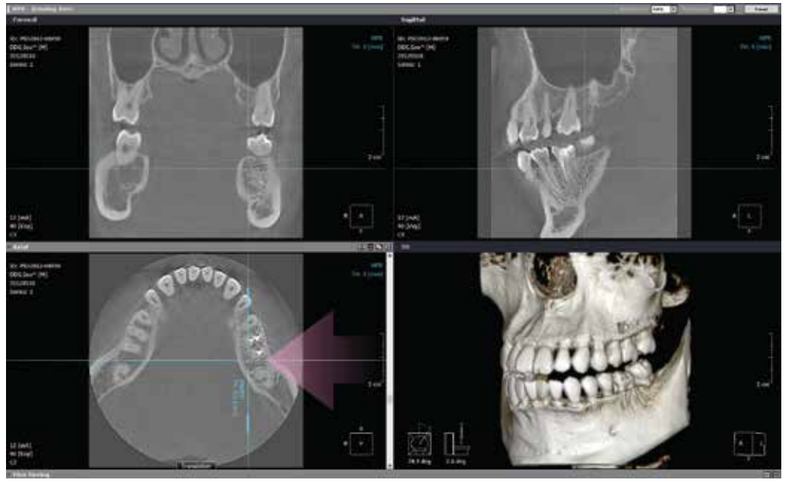

Web Viewer - Optional

Key Features

- Convenient use in tablet & smart phone
- Optimal viewing experience by responsive web design
- No need to install software

Please note that as a generic viewing application RAYSCAN **web** is not suited for diagnostic purposes.
However it is an excellent tool for communication a diagnosis made at SMARTDent for desktop.

ATCT (Adaptive Tube Cooling Time)
- Continuous acquisition without forced cooling prevents image downgrading

Auto Alignment
- All alignment components are automatically re-positioned

Minimized preparation time
- Provides psychological stability of the patient, reducing moving artifact of images

Wireless Remote Control
- Easy positioning system

be comfortable, with Ray

All patient position can be controlled by Wireless Remote Control

Various **cephalometric options** for your Practice

SC (Scanning Ceph)

OCL (One-shot Ceph Large)

OCS (One-shot Ceph Standard)

Technical Specifications

RAYSCAN *α*			
Type	Panoramic, Cephalometric, Cone Beam CT		
Patient positioning	Standing (wheelchair accessible)		
Focal spot	0.5mm		
Tube voltage	60~90kVp		
Tube current	4~17mA		
	3D (Expert 3D)		P (Expert)
Type	CBCT	Panoramic	Panoramic
FOV / Image size	10x10cm, 9x5cm*	Max. 15cm	Max. 15cm
Voxel size	100~300μm	-	-
Scan time	14sec	Max. 14sec	Max. 14sec
	Cephalometric (Option)		
Type	SC (Scanning Ceph)	OCL (One-shot Ceph Large)	OCS (One-shot Ceph Standard)
Image size	Max. 26x22.5cm	Max. 33x33cm	Max. 30x25cm
Exposure time	3.8~19.8sec	0.3 / 0.5sec	0.3 / 0.8sec

* The feature in specifications may differ from above depending on country/area due to its availability regulatory condition.

Dimensions (Unit:mm)

Suggested Operating Space

Top View



Front View



RAYSCAN *α* -P (Pano) / RAYSCAN *α* -3D (Pano + CT)

Suggested Operating Space

Top View



Front View



RAYSCAN *α* -SC (Pano + Scan ceph) / RAYSCAN *α* -SM3D (Pano + CT + Scan ceph)

better life, with Ray

For Children 2014

Ray Co., Ltd.
332-7, Samsung 1-ro, Hwaseong-si, Gyeonggi-do, 18380, Korea
Phone +82.31.605.1000
Email ray_overseas@raymedical.co.kr
Web www.raymedical.com

RBS-A01 (rev.6)